


Modular Fiber Panel – Sliding

Part of high-performance line of modular products, these blank patch panels accept Front Adaptor Plates. The patch panels are designed to mount in standard EIA 19-inch (482.6mm) racks.

This comes with sliding front trough, can be used for Indoor and Outdoor Fiber Cables. Same panel is suitable for splicing or direct plugging of connectors to the Adaptors.

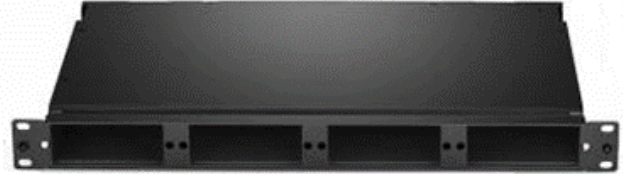

Construction

Panel Material	CRCA
Thickness	1.2mm
Rack Height	1RU, 2RU
Compatibility	4nos of Front Adaptor Plate (1U) 8nos of Front Adaptor Plate (2U)
Type	Shielded / Unshielded
Cable Entry	4 for 1U, 8 for 2U
Grounding Kit	Available
Colour	Black Matte Finish
Individual Port Labeling	Yes
Accessories	Cage Nuts (4), 6" Cable Ties (8)
Packaging	Panel and Accessories on a Carton Box

Environmental

Transport and storage	-20° to 75°C
Installation	4° to 50°C
Operation	-20° to 75°C

How to Order

Description	Colour	Height	Product Code
19" Rack mount sliding Unloaded 4 Adapter Plates front panel	Black	1RU	611301-1000
19" Rack mount sliding Unloaded 8 Adapter Plates front panel	Black	2RU	611401-2000

Other Height and Colours are available upon request.

Sliding Fiber Panel Accessories

Adaptor Plate

Material	CRCA
Thickness	1.0mm
Color	Black
Adaptor Compatibility	LC (Simplex, Duplex, Quad) SC (Simplex, Duplex), ST, FC, Blank
Adaptor Colour	Blue (SM UPC), Green (SM APC) Beige (MM), Aqua (OM3), Magenta (OM4)
Number of Adaptors	3 – 12 based on the Type

Splice Tray

Material	ABS
Compatibility	12 / 24 Splices per tray

Pigtail

Variant	Simplex
Fiber Type	Bend insensitive Single mode (OS2) Multimode (OM3/OM4)
Connector	SC/ST/LC/FC-UPC/APC
Connector Housing color	Single Mode: Blue Single Mode APC: Green Multimode: Beige/Aqua
Cable Color	Single Mode: Yellow Multimode: Aqua
Tight Buffer	900µm
Outer Jacket	LSZH
Ferrule Material	Zirconia Ceramic
Insertion Loss	Multimode < 0.20dB Single Mode < 0.30dB
Return Loss	Multimode > 35dB Single Mode > 50dB Single Mode APC > 60dB
Length	1.5mtr

Cable Manager

Base Material	CRCA
D Ring	ABS
Fire Rating	UL 94-V0
Size	1U, 2U
Compatibility	Copper Cables, Fiber Cables
Style	Loop Type
Colour	Black
Accessories	Cage Nuts (4)

How to Order

Description	Product Code
Adapter Plate for 4 or 8 Openings Panel with 6 x LC Duplex Multimode OM3 couplers	621123-4
Adapter Plate for 4 or 8 Openings Panel with 6 x LC Duplex Single Mode couplers	621120-4
Adapter Plate for 4 or 8 Openings Panel with 6 x SC Duplex Multimode OM3 couplers	621143-4
Adapter Plate for 4 or 8 Openings Panel with 6 x SC Duplex Single Mode couplers	621140-4
Blank Adapter Plate for 4 or 8 Openings Panel	621101-0
Splice tray for 12 splices with bend radius looms	623011
Splice tray for 24 splices with bend radius looms	623111
SC/UPC Single mode Bend insensitive Pigtail, LSZH, 1.5meter	640909-0015
SC/APC Single mode Bend insensitive Pigtail, LSZH, 1.5meter	640919-0015
SC/UPC Multi mode OM3 Pigtail, LSZH, 1.5meter	640309-0015
SC/UPC Multi mode OM4 Pigtail, LSZH, 1.5meter	640409-0015
LC/UPC Single mode Bend insensitive Pigtail, LSZH, 1.5meter	640929-0015
LC/APC Single mode Bend insensitive Pigtail, LSZH, 1.5meter	640939-0015
LC/UPC Multi mode OM3 Pigtail, LSZH, 1.5meter	640329-0015
LC/UPC Multi mode OM4 Pigtail, LSZH, 1.5meter	640429-0015
Horizontal Cable Manager, Loop Type, 1U, 75mm D Ring	318111
Horizontal Cable Manager, Loop Type, 2U, 75mm D Ring	318112

Other Accessories and Configurators are available upon request.

